

## ENVIRONMENTAL PROTECTION AND DISPOSAL

Old devices must not be disposed of with household waste. According to EU regulations, electronic devices must be handed in at a designated collection point at the end of their service life.

Use the country-specific return and collection systems for the disposal of old electrical or electronic equipment and batteries.

Dispose of packaging materials in an environmentally friendly manner.

## DECLARATION OF CONFORMITY

FELA GmbH hereby declares that the FELA SWITCH CASAMBI as the stationary 230 Volt wall switch and mobile battery switch comply with the 2014/53/EU directive.

FELA GmbH  
 Sturmbühlstraße 180 – 184  
 D-78054 Villingen-Schwenningen  
 Phone: +49 7720 3902-0 | [www.fela.de](http://www.fela.de)



## SAFETY INSTRUCTIONS

Danger of electric shock. Before working on the device, disconnect all associated circuit breakers (*stationary 230 V wall switch*).

Danger of explosion if incorrect batteries are used. Keep batteries out of the reach of children. Swallowing a battery can have life-threatening consequences (*mobile battery version*).

Protect the system from direct sunlight to avoid high temperatures. Avoid using the switch in strongly heated rooms and, if possible, keep it away from heat sources.

Keep the switch away from rooms with high humidity.

If the glass is damaged, e.g. due to a fall, the switch must not be used again. There is a risk of injury. Damage to the glass can lead to false triggering.

There is a risk of burns if the glass surface is too hot. Let the system cool down before using the device again.

## TECHNICAL SPECIFICATIONS


	Stationary 230 Volt	Mobile battery switch
Operating voltage	220 – 240 V	3,3 V button cell (CR2430)
Frequency	50 Hz	
Power consumption	< 5 mA	< 50 µA
Operating temperature	10 to 30° C	
Storage temperature	-20 °C to 60 °C	
Signal transmission	Bluetooth 4.0	
Frequency	2,4 GHz	
Max. transmission power	2,51 mW	
Bluetooth range	up to 30 m	
Surface	Glass in black, white, silver-grey	
Dimension (L x W x H)	86 x 86 x 43,3 mm (surface 11,6 mm)	89 x 89 x 9,8 mm
Wallpaper compensation	max. 1 mm	-

You will find comprehensive operating and installation instructions on our website at [www.fela.de/downloads-2](http://www.fela.de/downloads-2)

# OPERATION AND INSTALLATION MANUAL


## FELA SWITCH CASAMBI

stationary 230 Volt / mobile battery switch

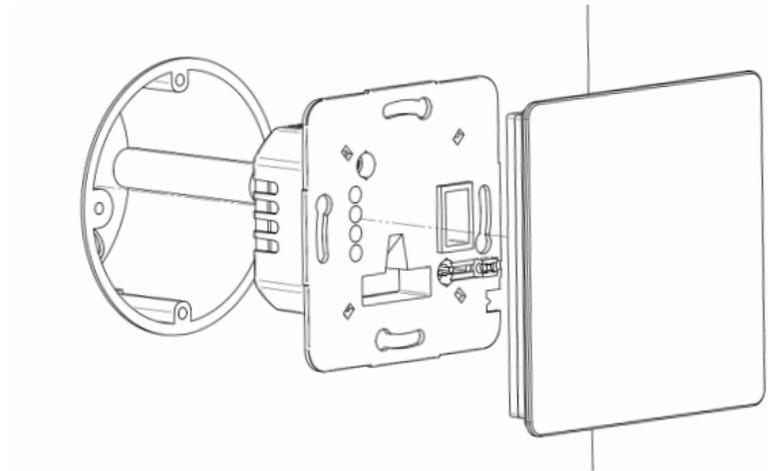


### 1a. Mounting the switch (stationary 230V)

Connect the flush-mounted insert (power supply unit) and then mount it in the correct position in the existing installation (socket). Insert the glass front panel, it must be clicked into place with an audible snap.

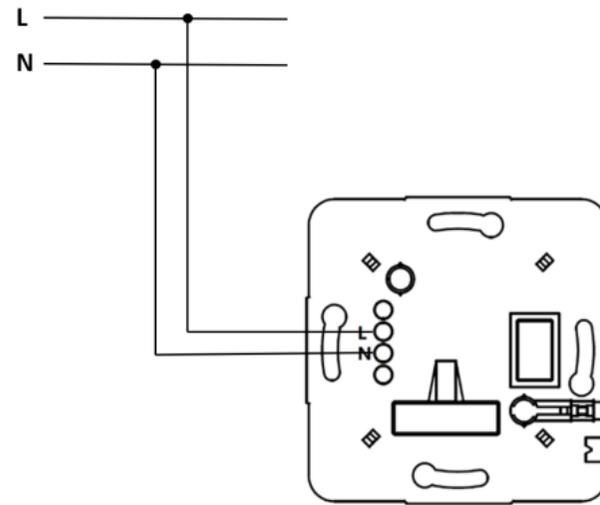


### 1a. Installing the switch (stationary 230V)

The power section must be connected as shown (L/N). For this purpose, the connecting cables must be skinned approx. 6 - 8 mm. Then adjust the power section appropriately and fix it using the mounting screws of the flush-mounted insert.

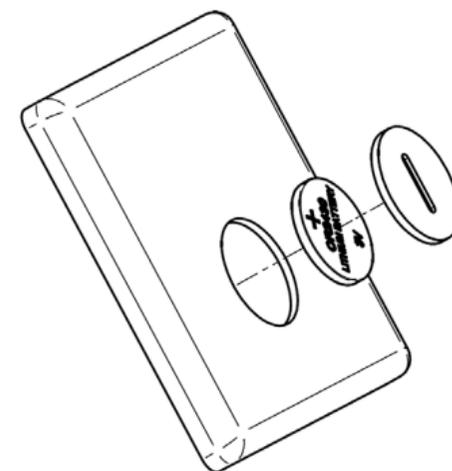

### 1b. Inserting the battery (mobile battery switch)

Open the battery compartment carefully by turning it counterclockwise. Insert a button cell type CR2430 with the positive terminal pointing towards the battery cover. Turn battery cover clockwise to close. It may only be closed with the battery inserted.

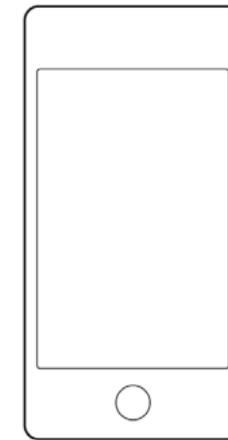

### 2. Initialize / configure switches

By pressing any key of the FELA SWITCH, the automatic detection in the app is triggered.  
By tapping on „Add to ...“ the desired network can be selected.